

# MFQ3-SERIES

## 3通路气动系列旋转接头 (3进3出)




### 产品特点: PRODUCT CHARACTERISTICS

- 特殊密封设计, 密封性能好, 无泄露, 寿命长
- 双列高精度进口球轴承排列, 运行平稳
- 适应多种设备, 输送气体和真空

### 工作参数: WORKING PARAMETERS

- 气体通道数: 3进3出
- 最大正压: 1MPA
- 真空压力: -1.5KPA
- 最高转速: 300RPM(可定做3000RPM)
- 材质: 不锈钢/铝合金
- 工作温度: -40°C~+125°C

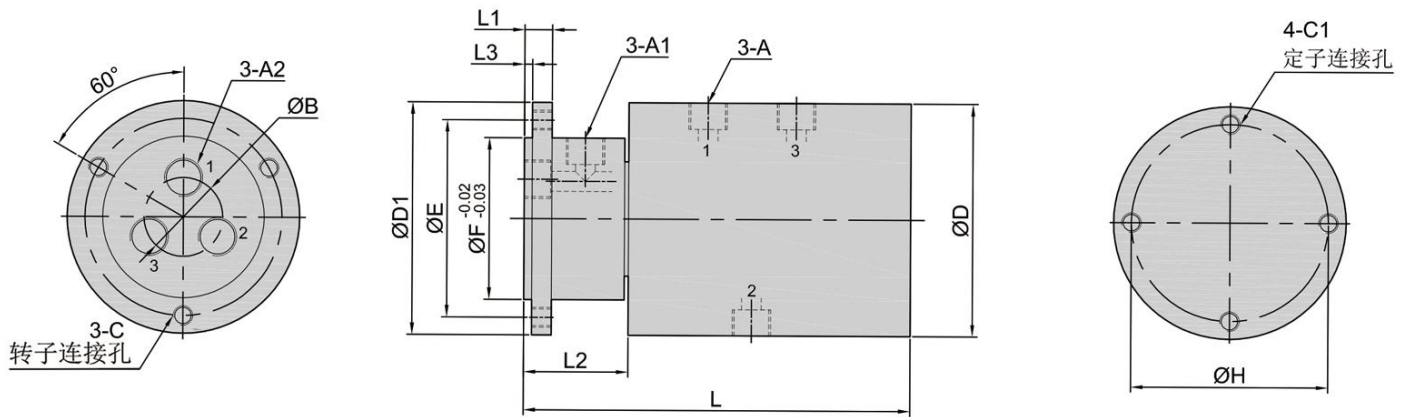

型号 Model	A	A1	A2	B mm	C mm	C1 mm	D mm	D1 mm	E mm	F mm	H mm	L mm	L1 mm	L2 mm	L3 mm
MFQ3M5	M5	M5	M5	14	M4	M4	44	44	36	26	36	78	7	18	2
MFQ318	G1/8	G1/8	G1/8	20	M5	M5	59	59	50	41	50	98	7	26	2
MFQ314	G1/4	G1/4	G1/4	22	M5	M5	59	59	50	41	50	101.5	7	27.5	2
MFQ338	G3/8	G3/8	G3/8	29	M6	M6	84	84	74	64	74	121	7	32.5	2
MFQ312	G1/2	G1/2	G1/2	31	M6	M6	89	89	78	68	78	142	9	40	2
MFQ334	G3/4	G3/4	G3/4	50	M8	M8	108	119	107	88	95	168	10	50	2
MFQ301	G1	G1	G1	54	M8	M8	134	134	120	104	120	205	10	62	2