



SHEET1

Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

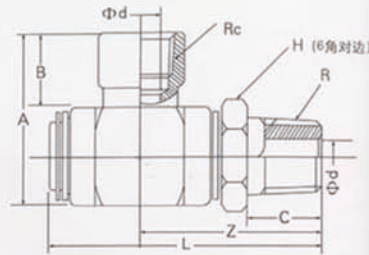

型号	规格	R*G	L	A	B	d	C	H	Z	重量(g)
MNJ 04DC	04	1/4	54	36	17	5	13	19	36	115
MNJ 06DC	06	3/8	62	42	20	8	16	22	42	165
MNJ 08DC	08	1/2	73	50	23	11	19	27	50	290
MNJ 12DC	12	3/4	88	63	27	16	21	36	59	615
MNJ 16DC	16	1	97	70	29	21	23	41	65	830
MNJ 20DC	20	1 1/4	111	81	31	28	25	50	73	1320
MNJ 24DC	24	1 1/2	126	93	33	34	27	55	82	1990
MNJ 32DC	32	2	144	106	36	43	30	70	95	3035

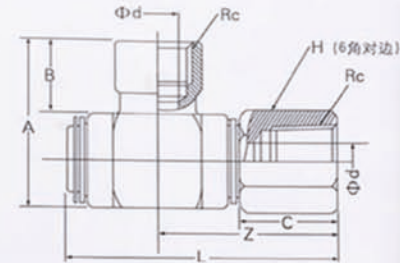

型号	规格	R*G	L	A	B	d	C	H	Z	重量(g)
MNJ 04DD	04	1/4	49	36	17	5	16	19	31	115
MNJ 06DD	06	3/8	56	42	20	8	19	22	36	165
MNJ 08DD	08	1/2	66	50	23	11	22	27	43	270
MNJ 12DD	12	3/4	80	63	27	16	25	36	51	610
MNJ 16DD	16	1	89	70	29	21	28	41	57	795
MNJ 20DD	20	1 1/4	102	81	31	28	30	50	64	1300
MNJ 24DD	24	1 1/2	116	93	33	34	32	55	72	1950
MNJ 32DD	32	2	129	106	36	43	35	70	80	2780

技术参数:
 最高转速: 50RPM
 最高温度: 125°C
 最大压力: 250Bar
 介质: 气 真空 液 液压油 等

Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

TOLERANCE
 EXCEPT AS NOTED
 x.x ± 125
 x.xx ± 0.15
 x.xxx ± 0.005
 ANGLES ± 0.5°

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER APPROVAL/DATE:

SHAFT MEL/PLTING:
 CARBON STL
 94-62 RC
 BLK OXIDE

CUSTOMER:

STOCK

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

SHAFT MEL/PLTING:
 CARBON STL
 BLK OXIDE

P/N:

REV:

A 4

THIRD ANGLE PROJECTION:

